

## SPECIFICATIONS

<b>Loudspeaker Type:</b>	2-way, full-range, coaxial ceiling loudspeaker
<b>Operating Range:</b>	60 Hz to 18 kHz 80 Hz to 12.5 kHz ( $\pm 4$ dB)
<b>Max Input Ratings:</b>	200W continuous, 500W program 40 volts RMS, 89 volts momentary peak
<b>Recommended Power Amplifier:</b>	420W to 600W @ 8 ohms
<b>Sensitivity (1W/1m):</b>	97 dB SPL (100 Hz to 13 kHz 1/3 octave bands) 97 dB SPL (250 Hz to 4 kHz speech range)
<b>Maximum Output:</b>	120 dB SPL / 127 dB SPL (peak)
<b>Nominal Impedance:</b>	8 ohms
<b>Minimum Impedance:</b>	3.6 ohms @ 11.7 kHz
<b>Nominal -6dB Beamwidth:</b>	60° H (+20° / -6°, 1.6 kHz to 12.5 kHz) 60° V (+20° / -3°, 1.6 kHz to 12.5 kHz)
<b>Axial Q / DI:</b>	15.2 / 11.8, 1.6 kHz to 12.5 kHz
<b>Crossover Frequency:</b>	2000 Hz
<b>Recommended Signal Processing:</b>	60 Hz high pass filter
<b>Drivers:</b>	LF (1) 12" HF (1) 1" exit, titanium free, Ferrofluid-cooled
<b>Driver Protection:</b>	DYNA-TECH
<b>Input Connection:</b>	Barrier strip
<b>Controls:</b>	Midband attenuator
<b>Enclosure Hardware:</b>	(1) standard ported baffle
<b>Mounting/Rigging Provisions:</b>	(8) mounting points for standard backboxes
<b>Grille:</b>	None
<b>Required Accessories:</b>	24 dB/Oct high pass filter Backbox
<b>Supplied Accessories:</b>	(4) 8/32 screws for mounting baffle to backbox
<b>Optional Accessories:</b>	C12BB3 high density 3.0-cu.ft metal backbox C12SQGRL square white grille RAIL24-PR 23.75-inch channel rails RAIL30-PR 30-inch channel rails RAIL48-PR 47.75-inch channel rails
<b>Dimensions —</b>	
<b>Square Baffle:</b>	14.625" x 14.625" (371.48 x 371.48 mm)
<b>Height:</b>	Depth from back of baffle: 6.938" (176.21 mm)
<b>Weight:</b>	17.2 lbs (7.8 kg)
<b>Shipping Weight:</b>	21 lbs (9.53 kg)

### NOTES:

1. Sensitivity: Free field pink noise measurement at 40 ft (12.2 m) at 50% power; extrapolated to 1 meter and an input of 2.83 volts RMS.
2. Watts: All wattage figures are calculated using the rated nominal impedance.
3. All measurements are calculated using a CLOUD1266 ceiling loudspeaker system mounted within a C12BB3 metal backbox.



## APPLICATIONS

- Convention centers, exhibit halls
- Corporate training rooms, ballrooms
- Swimming pools, cruise ships
- Athletic venues, sports facilities, health clubs
- Houses of worship
- Malls, airports

## FEATURES


- Rugged 12" cast frame LF driver
- Tuned, ported bass reflex design
- Powerful 200W continuous / 500W program
- Precise pattern control HF horn
- Fast and easy installation
- Built-in protection circuitry
- Selectable midband attenuation
- Smooth, uniform frequency response
- Five-year warranty

## DESCRIPTION


The CLOUD1266 is a powerful coaxial 2-way ceiling loudspeaker assembly with a single 12" cast frame low frequency driver and a 1" high frequency compression driver on a coaxially mounted 60° x 60° pattern control horn. The CLOUD1266 is designed for high ceiling applications requiring higher power handling and low distortion combined with smooth full-range response. CLOUD1266 ceiling systems are mounted on an integral baffle. They are easily matched with industry standard backboxes, grilles and tile bridges. The CLOUD1266 is designed for standard 8 ohm operation.

For applications requiring greater LF output, a 12-inch ceiling subwoofer system is available (model CLOUD12SUB). Optional accessories offered by Community include a high density metal backbox (model C12BB3), an attractive white square grille (model C12SQGRL) and tile bridges of various lengths (models RAIL24-PR, RAIL30-PR and RAIL48-PR).


## FREQUENCY RESPONSE

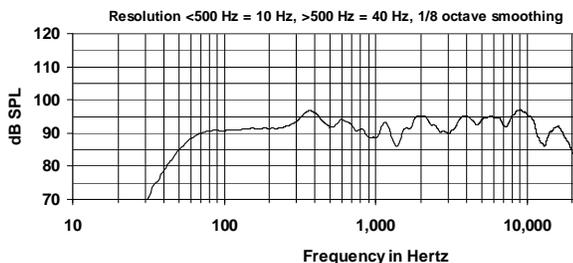


## IMPEDANCE

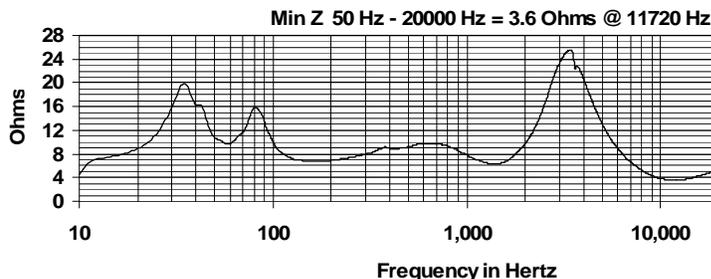


## BEAMWIDTH

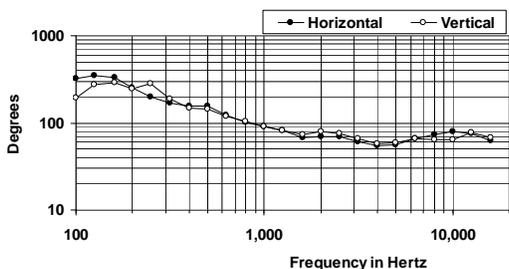

## AXIAL Q

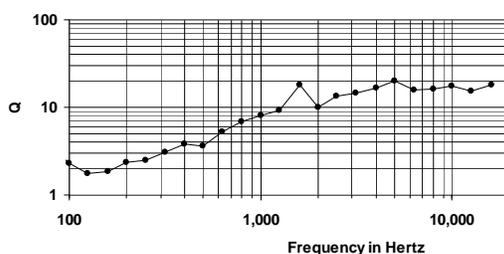

## DIMENSIONS

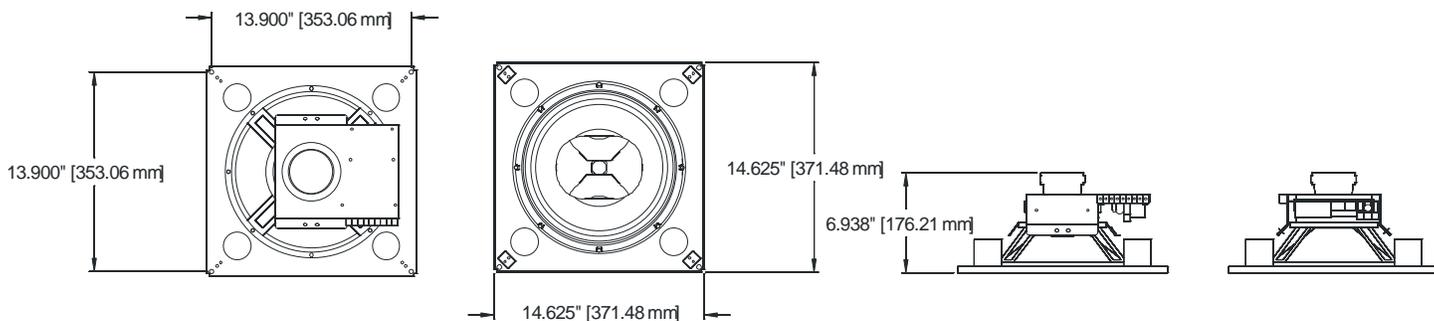

## ARCHITECTURAL SPECIFICATIONS

The loudspeaker system shall be a two-way, full-range bass reflex ceiling design with a single cast alloy frame 12" woofer and one 1" exit HF driver coaxially mounted on a 60° x 60° horn. The entire loudspeaker assembly shall be mounted on a black steel baffle. Drivers shall be connected to an integral crossover with a crossover frequency of 2 kHz and integral over-current protection circuitry. Connection is by a screw terminal barrier strip. The system shall have an amplitude response of 80 Hz - 12.5 kHz (+/- 4 dB), input capability of 40 V RMS, 97 dB Sensitivity at one meter and 2.83 V, 8 ohm nominal impedance. The nominal dispersion shall be 60° H x 60° V from 1.6 kHz to 12.5 kHz. The dimensions of the enclosure are defined as 14.625" x 14.625" x 6.938" at a weight of 17.2 lbs.

*Community strives to improve its products on a continual basis. Specifications are therefore subject to change without notice.*