

# PLM 10000Q



## PLM 10000Q Powered Loudspeaker Management system

The two- input, four- output PLM 10000Q seamlessly integrates networked digital signal distribution, drive processing, power amplification, and load verification plus performance monitoring in a single hardware unit and unified software controller. This new approach,

designated Powered Loudspeaker Management (PLM), is a cohesive blend of Lake® Processing and Lab.gruppen power. As a complete system, the PLM 10000Q affords significant benefits when compared to conventional approaches utilizing separate components.

## Lab.gruppen Technology

- ▶ 2350 W per channel @ 2 ohms\*\*
- ▶ 2300 W per channel @ 4 ohms\*\*
- ▶ 2U chassis weighing only 13.5 kg (30 lbs)
- ▶ Class TD® output stage
- ▶ Regulated Switch Mode Power Supply (R.SMPS™)
- ▶ Copper-finned Intercooler® with transverse-mounted output devices
- ▶ Full suite of protection and fault monitoring features
- ▶ Comprehensive loudspeaker preset database
- ▶ LoadLibrary™ load “Fingerprint” (identity and characteristics) data
- ▶ Comprehensive LoadSmart™ load verification and SpeakerSafe™ continuous loudspeaker performance monitoring
- ▶ Dante™ low-latency digital network included as standard

- ▶ Compatible with Lake LM 26, Dolby® Lake Processor and other legacy Lake devices
- ▶ Primary and secondary network connections
- ▶ Digitally controlled “amplifier gain” adjustable in 0.1 dB steps from 22 to 44 dB
- ▶ Digital output attenuation in 0.25 dB steps from -inf to 0 dB
- ▶ Binding post or Neutrik® speakON® (1 x NLT8, 2 x NLT4) power output connectors
- ▶ Digitally implemented, zero-overshoot Inter-Sample Voltage Peak Limiting (ISVPL™) adjustable in 0.1 V steps from 17.8 to 153 V
- ▶ Power Average Limiter (PAL)
- ▶ High-brightness front-panel LCD display
- ▶ Moisture resistant silicone touchpad for front-panel display mode selection and menu navigation

\*\* More power available when driven asymmetrically.

## Lake Processing Technology



- ▶ Raised Cosine Equalization™
- ▶ Linear phase and classical crossovers
- ▶ LimiterMax™ – peak and RMS limiters
- ▶ Iso-Float™ ground isolation
- ▶ Super Module capability
- ▶ Integration of third party frequency measurement and analysis system via the Lake Analyzer Bridge
- ▶ Analog and AES digital inputs with loop-thru outputs
- ▶ Auto-select input router for all inputs with user definable priorities

# Powered Loudspeaker Management: Technology Overview

## Power Amplifier

Although based on technology in Lab.gruppen's road-proven FP+ Series, the amplifier platform in the PLM 10000Q Powered Loudspeaker Management system incorporates further enhancements for even greater sustained output power. The basic output topology remains Lab.gruppen's patented Class TD (offering Class D efficiency with the sonic purity of Class B designs), but with new circuitry for substantially greater current-carrying capabilities. The Regulated Switch Mode Power Supply (R.SMPS) is optimized to deliver full power during long low-frequency bursts, as well as maintain stable rail voltages despite fluctuating line voltage. The PLM Series also offers extreme power density, patented Intercooler cooling, a full suite of protection features, and a Power Average Limiter (PAL) to prevent tripping of mains breakers.

## Load Verification and Continuous Performance Monitoring

The PLM 10000Q includes a revolutionary set of tools for fast, accurate load verification and real-time performance monitoring. The key to both features is the LoadLibrary, a comprehensive database that provides unique "Fingerprints" (load characteristics) for each loudspeaker model in the system. Using this data and on-board DSP, LoadSmart compares predicted response (using a brief test signal) to the actual response, instantly identifying potential problems. When activated, SpeakerSafe real-time performance monitoring helps the operator avoid power compression and provides ongoing detailed critical information about system-wide driver integrity.

## Lake Processing

The PLM 10000Q contains four full-featured Lake Processing modules, each offering precise settings for gain, delay, crossover slope, equalization, and limiting. Exclusive Lake Processing algorithms are included for Raised Cosine Equalization, linear phase crossovers, LimiterMax loudspeaker protection, and Iso-Float ground isolation. Raised Cosine Equalization is the foundation for the Lake Mesa EQ and the Ideal Graphic EQ, the two revolutionary EQ interfaces used by the Dolby Lake Processor. Mesa EQ offers asymmetric filtering to match the asymmetric responses of many loudspeaker systems. The Ideal Graphic EQ offers true sum-to-flat response, so the adjustments provide uniform boost and cut along with greater selectivity.

Lake Processing also offers both classical crossovers (selectable up to 48 dB per octave) and linear phase crossovers. Capable of slopes exceeding 180 dB per octave, linear phase crossovers offer greater control to limit lobing and off-axis cancellation.

## Lake Controller software

Lake Controller software provides a unified interface for control and monitoring of all functions of the Powered Loudspeaker Management system. In addition to controlling all parameters of standard

Lake Processing (therefore appropriate for use with Dolby Lake Processors), all new versions provide control and monitoring of exclusive PLM features: digital input gain and attenuation, and load verification and performance monitoring via LoadSmart and SpeakerSafe.

The flexible Lake Controller software environment can control extensive networks of powered loudspeaker management systems from a single computer. The user interface is based on discrete processing modules, with each module assigned to power outputs normally defined for sets of band-limited drivers (e.g. low, mid, high, subs). Adjustments can be made in real time to any parameter of any module on the network. Modules may be assigned to groups representing subsystems in larger systems, such as main arrays, delays, and fills in an arena system. Because each module can be assigned to more than one group, the Lake Controller can simultaneously address multiple groups for global adjustments as needed while maintaining independent control of separate subsystems and individual components.

The Super Module functionality allows a single on-screen module interface to control output channels in different PLM units. For example, a three-way Super Module could be configured using a high-power LF channel in one PLM unit along with lower-powered MF and HF channels in a different unit.

The Lake Controller software is optimized for a wireless Tablet PC. Operation is easy and intuitive, with the "feel" of real-time analog faders and controls. The same Lake Controller interface can be used to operate Dolby Lake Processors, Lake Contour, and Lake Mesa Quad EQ processors as part of a unified system.

Another Lake Controller software feature is seamless integration with third party real-time sound system measurement, optimization, and control software packages via the Lake Analyzer Bridge. Users can measure spectrum and transferfunction and adjust system EQ at the same time, using the same user interface.

## Dante Digital Audio Network


The PLM Series Powered Loudspeaker Management systems are equipped as standard with Dante, a self-configuring digital audio networking solution from Audinate® of Australia. Based on the newest developments in networking technology, Dante provides reliable, sample-accurate audio distribution over Ethernet with extremely low latency. Dante incorporates Zen™, an automatic device discovery and system configuration protocol which enables PLM Series products and other products with Dante (like Dolby Lake Processors) to find each other on the network and configure themselves.




PLM 10000Q Neutrik speakON connector version shown.



The front panel is the “local control center” for the PLM 10000Q. An intuitive, menu driven interface allows quick access to key functions using the moisture resistant silicone touchpad. Information is clearly displayed on the daylight-readable, 2.5-inch LCD panel. The soft-button keypad and precision rotary encoder provide control of processing and amplification functions, with key lock available.

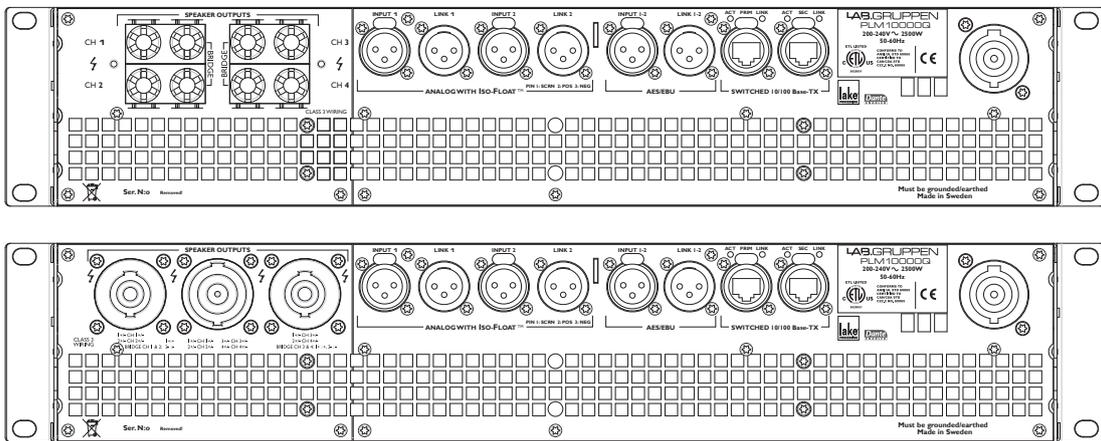

The PLM 10000Q is available with either binding posts or an “embedded patch panel” with Neutrik speakON connectors (2 x NLT4 and 1 x NLT8). Common connectors include; 2 x analog input XLR with switchable Iso-Float, 2 channels of AES/EBU with link-through capability for daisy chaining, 2 x EtherCON® for linking or redundancy. A 32 amp PowerCON® connector is used for mains supply.

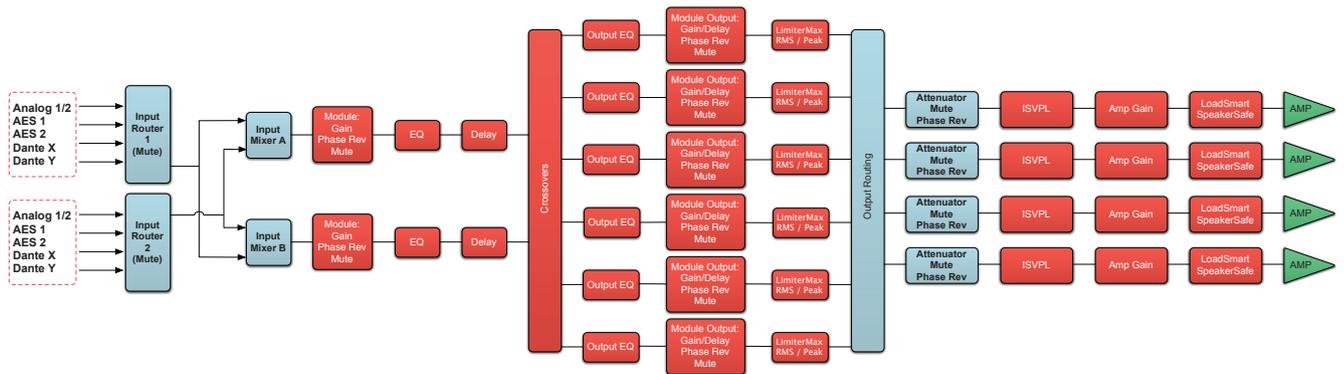

This signal flow block diagram illustrates the flexible mixing and routing, as well as the powerful signal processing capabilities, offered by the PLM Series. The input routers allow for redundant and prioritized inputs, with automatic switch over in case of signal failure. The input mixers provide mixing capabilities between the outputs of the two input routers. The two Lake Processing modules (covering all red blocks) provide user EQ, crossover and output filters along with gain adjustments, mute, phase reverse, delay, and limiters. Module outputs can be routed to either power output channel. Each power output channel provides individual channel attenuation, mute and phase reversal. Each power output channel also implements configurable amplifier gain and an advanced peak limiter in the ISVPL.

The flexible architecture of the PLM Series allows the settings for each unit to be stored in different hierarchies. The Lake Processing modules can be instantly configured with module files that are cross compatible with Dolby Lake products. Settings can also be stored and recalled on a system and subsystem level (system/subsystem files) as well as on a device level (frame presets).

# Specifications PLM 10000Q

<b>General</b>				
Number of input channels	2			
Number of output channels	4			
Peak total output all channels driven	10800 W			
Max. Peak output voltage per channel	153 V			
Max. output current per channel	49 A peak			
<b>Max. Output Power</b>				
All channels driven	<b>2 ohms</b>	<b>4 ohms</b>	<b>8 ohms</b>	<b>16 ohms</b>
All channels driven into optimal impedance interval	2350 W <sup>(1)</sup>	2300 W <sup>(1)</sup>	1300 W	660 W
8 ohms bridged per ch.	> 2700 W into 2.4 – 3.2 ohms			
4 ohms bridged per ch.	4600 W			
Bridged into optimal impedance interval	4700 W			
	>5400 W into 4.8 – 6.2 ohms			
<b>Audio Performance</b>				
THD + N 20 Hz - 20 kHz for 1 W	< 0.05%			
THD + N at 1 kHz and 1 dB below clipping	< 0.04%			
Dynamic range with digital inputs (for all supported sample rates)	> 116 dB			
Dynamic range with analog inputs	> 112 dB			
Frequency response (1 W into 8 ohms, 20 Hz - 20 kHz)	+/-0.05 dB			
Common Mode Rejection (CMR)	> 74 dB, 20 Hz to 20 kHz			
Internal sample rate	96 k			
Internal data path	32 bit floating point			
Product propagation delay, best case (96 kHz AES)	1.61 ms			
Product propagation delay, analog input	1.68 ms			
<b>Sample Rate Converters</b>				
THD + Noise	0.00003 %, 20 Hz - 20 kHz, unweighted			
<b>Analog to Digital inputs</b>				
Inputs	2 inputs x 2 link			
Input sensitivity range	+12 or +26 dBu			
THD + Noise	0.00022 %, typical at 1 kHz unweighted at +26 dBu headroom setting			
	0.00033 %, typical at 20 Hz and 20 kHz unweighted at +26 dBu headroom setting			
<b>AES / EBU inputs</b>				
Inputs	2 inputs x 2 link			
Supported resolutions	≤ 24 bit			
Supported sample rates	44.1, 48, 88.2, 96, 176.4, 192 kHz			
<b>Dante Audio Network</b>				
Inputs and outputs	2 inputs, 2 outputs			
Supported sample rates	48, 96 kHz			
Supports redundant paths	Yes			
Flexible topology	Yes			
Network latency	0.8, 1.3 and 4 ms			
<b>Device presets</b>				
Local memory locations for the settings of the product	100			
<b>Limiters</b>				
Adjustable Inter-Sample Voltage Peak Limiter (ISVPL)	17.8 - 153 V, step size 0.1 V			
Current Peak Limiter < 300 ms	49 A peak			
Current Average Limiter (CAL) > 300 ms	25 Arms			
LimitersMax (rms and peak limiters)	Yes			
– MaxRMS (rms voltage limiter)	Yes			
– MaxPeak (peak voltage limiter)	Yes			
<b>Gain</b>				
Amplifier gain	22 - 44 dB, step size 0.1 dB			
Analog attenuator	-Inf to 0 dB, step size 0.25 dB			
<b>Rear-panel interface</b>				
AES / EBU / I/O (input + link)	2 x 3-pin XLR			
Analog, 2-channel I/O (input + link)	4 x 3-pin XLR, electronically balanced			
Output connectors	Neutrik speakON (1 x NLT8, 2 x NLT4) or 4 Binding Posts (pairs)			
Auto 10/100, Auto Uplink	2 x RJ45 etherCON			
Control and monitoring interface	Via Ethernet for Lake Controller software, or DLM (the 3rd Party Protocol)			
Detachable mains cord	Neutrik powerCON 32 A			
Cooling	Two fans front-to-rear airflow, temperature controlled speed			
<b>Front-panel user interface:</b>				
Display	2.5 inch, daylight readable LCD			
Fault/Warning/Limit/Clip indicators	RGB LEDs and detailed fault description on display			
Mute and soft function buttons	8 provided			
Standby Power button	On/Standby			
Mute Enable button	Enables muting of outputs and inputs via soft-button keypad			
Meter button	Toggles through meter views			
Menu button	Provides a menu driven interface for full function front panel control			
Rotary Encoder	Yes			
Exit button	Provides a "back" function			
<b>Power</b>				
Operating voltage (45 - 66 Hz)	Universal power supply 140 - 265 V / 70-135 V <sup>(2)</sup>			
Soft start / Inrush Current Draw	Yes / max. 5 A			
Power Average Limiter (PAL)	Yes			
Power Factor Correction (PFC)	No			
Breaker Emulation Limiter (BEL), software controlled 5 - 32 A	No			
Under-Voltage Limiter (UVL)	No			
<b>Dimensions</b>				
Rack rail to rear panel	W: 483 mm (19"), H:88 mm (2 U), D: 386 mm (15.2")			
Overall depth including handles and rear support	460 mm (18.1")			
<b>Weight</b>				
	13.5 kg (30 lbs)			
<b>Finish</b>				
	Black painted steel chassis with black painted steel / aluminum front			
<b>Approvals</b>				
	CE, ANSI/UL 60065 (ETL), CSA C22.2 NO. 60065, FCC			

**Note 1):** Asymmetrical loading of the outputs will yield even higher ratings. If one (or two) channel(s) has reduced power requirements, then the voltage drop from the power supply will be reduced, resulting in higher power availability for the other channel(s).

**Note 2):** Separate 230 V or 115 V versions available. Not selectable on the product.

**All specifications are subject to change without notice.**

Intercooler, Class TD and Lake are national and/or international registered trademarks of Lab.gruppen AB. PLM, Powered Loudspeaker Management, R.SMPS, LoadLibrary, LoadSmart, SpeakerSafe, BEL, UVL and ISVPL are trademarks of Lab.gruppen AB. Dolby and the double-D symbol are registered trademarks of Dolby Laboratories. Contour, Mesa Quad EQ, Mesa Parametric EQ, Raised Cosine Equalization, LimiterMax and Iso-Float are trademarks of Dolby Laboratories. Audinate is a registered trademark of Audinate Pty Ltd. Dante and Zen are trademarks of Audinate Pty Ltd. All other trademarks remain the property of their respective owners.

Copyright © 2010 Lab.gruppen AB.

All rights reserved.



LAB.GRUPPEN AB • SWEDEN

INTERNATIONAL CONTACT ▶ INFO@LABGRUPPEN.COM | US & CANADA CONTACT ▶ INFO@TCG-AMERICAS.COM

WWW.LABGRUPPEN.COM

Item no. TDS-PLM10000Q\_V15