

# IPQUARTZ-I INFRASUB™

SELF-POWERED & SELF INFRA™ PROCESSED

## APPLICATIONS

Stadium Sound Reinforcement      House of Worship  
Auditorium Sound Reinforcement      Theatrical Sound Reinforcement  
Nightclub Installations

## DESCRIPTION

The IPQUARTZ-I is a very high output Minima One™ self-powered, internally Infra™ processed, concert subwoofer system. It is designed to minimize the space required to obtain extremely high level and high fidelity low frequency output. The internal Minima One™ amplifier incorporates a high efficiency low power consumption green design with advanced digital switching to automatically accept any line voltage from 88 to 270 volts. Low voltage contacts are provided for installations to remotely turn the amplifier on and off.



## SPECIFICATIONS

### System Type:

4 - Infrasub™ sealed chambers 3 ft<sup>3</sup> each

### Enclosure:

18 mm 13-ply birch plywood

### Finish:

Black Ro Tex™ True water born environmental finish

### Grille:

14 Gauge black powder coated perforated steel in a welded extruded aluminum frame

### Low Frequency Components:

4 - EL18A 18" Transducers, Infra™ Cone, 3" Voice coil, 120 oz. Magnet

### Input Connector:

XLR 1/4" combo with XLR loop through

### Internal Amplification:

2 - Minima One™

### Input Impedance:

48K Ohms

### Input CAL Sensitivity:

+4 dBu

### Maximum Continuous Amplifier Power:

2700 W into 2 Ohms

### High Pass Filter:

Switchable: -6 dB @ 8 Hz; @ 50 Hz; @ 95 Hz

### Overload Protection:

Internal Dynamic Filter™ protection

### LED Indicators:

Green - On  
Yellow - System limit  
Red - System fault or sleep mode

### Mains Voltage Requirements:

Auto sensing  
Universal voltage range  
88 Volts minimum to 270 Volts maximum

### Mains Current Requirements:

9.2 Amps @ 120 Volts  
4.6 Amps @ 240 Volts

### Hardware:

16 - Machined aluminum speaker mounting clamps  
Optional F8 Fly points available

### Fly Points Safe Working Load:

300 lbs.

### Crossover Type:

Internal Infra™ Integrator Inside

### Frequency Response:

18 Hz to 80 Hz ±3 dB

### Low Frequency Limit:

8 Hz

### Maximum Calculated Continuous Acoustic Output:

Half Space @ 1 Meter  
10 Hz - 101 dB SPL  
20 Hz - 115 dB SPL  
40 Hz - 131 dB SPL  
80 Hz - 135 dB SPL

### Polarity:

A positive asymmetrical signal applied to pin 2 will result in a positive asymmetrical acoustical pressure

### Dimensions:

40" h x 30" w x 31" d  
102 cm x 76 cm x 79 cm  
Trapezoidal - 6 degree taper per side

### Weight:

234 lbs  
106 kg

### Custom Finishes:

Optional custom finishes include white or unfinished ready to paint.

INFRA™, INFRASUB™, MINIMA ONE™ and DYNAMIC FILTER™ are trademarks of Modular Sound Systems, Inc.  
BAG END® is a registered trademark of Bag End, Inc.

# IPQUARTZ-1 INFRASUB™

## ABOUT INFRASUB™ TECHNOLOGY

Almost all designs and specifications for subwoofer systems are fixated on the frequency response domain. However, the impression of power and quality of a loudspeaker is equally related to the time domain. The long wavelengths associated with low frequencies, make this particularly true with subwoofers. Likewise, the maximum SPL is not a very reliable way to judge the impact of a subwoofer. A poor time domain performer will not have the same impact or natural musically connected sound as a Time-Aligned™ Infra™ system. The reason that an Infra™ subwoofer sounds dramatically better is because of its superior time domain performance, as well as its extended low frequency response. The Infra™ subwoofer maintains the bass energy in a tight packet, aligned with the upper range signal, providing a greater body impact and a seamless musical connection with the main loudspeakers. Conventional subwoofer designs perform so poorly in the time domain because designers have used methods that sacrifice the phase response for more control over the frequency response (e.g.: steep low pass filter slopes, vented speaker enclosures, and narrow bandwidth systems). With the Infra™ technique, we do not degrade the phase response while extending the frequency response. While the Infra™ dual Integrator does function as the system crossover, it does so without using a conventional low pass filter. The Infra™

integrator applies an inverse electrical response to the acoustical response of the Infra™ loudspeaker in its sealed enclosure. This provides both the upper frequency roll off and the extended frequency response while maintaining the hi sound quality often associated with a sealed box design. When comparing a genuine Bag End® Infra™ loudspeaker system to any other, our technology and design is easy to hear and appreciate. The dramatic clarity, realism, and overall pleasant sound of an Infra™ system is well noted throughout the world.

## ABOUT MINIMA ONE™ AND INFRA™ SELF PROCESSING



Infra™ self processed systems incorporates our analog Infra™ dual integrator into the Minima One™ input circuit. Infra™ Self Powered Systems accept a full range line level audio signal, and utilizes internal Infra™ processing to provide the extended low frequency acoustical response, as well as a uniform roll off, of the upper range of the subwoofer. The Dynamic Filter™ protection is included and preset to the amplifiers sensitivity, requiring no external setup. The Minima One™ amplifier is both a high fidelity and a high efficiency amplifier. With efficiency well over 80%, it provides more power to the loudspeakers, and creates less heat in the amplifier. In real world applications there is practically no heat emitted from the amplifier and thus it requires no cooling fan. The power factor corrected AC

power input, automatically and continuously adapts to any voltage between 88 and 270 volts. The Minima One™ is convenient and stable to operate on any power grid in the world.

## ABOUT DYNAMIC FILTER™

The Dynamic Filter™ is a complimentary technology to the Infra™ system taking unique advantage of the Infra™ design approach, to implement a reliable protection scheme that is transparent and inaudible to the listener. Systems using the external rack mount Infra-MXB processor require an appropriate threshold adjustment that sets the amplifiers power and sensitivity to the Infra™ loudspeakers in use. When a system is asked to do more than it is capable of, or if an accidentally large signal is presented the threshold of the Dynamic Filter™ is crossed and the system protects itself from the bottom up by reducing the lowest frequencies first. Since the most power and excursion is always required at the lowest frequency, reducing the level of the lowest frequencies first avoids an overload, while at the same time the system is able to reproduce the middle and upper bass and leave the upper crossover region unaffected. This is a very natural and inaudible method to protect the system and unique to the Infra™ technology.

## DIMENSIONS

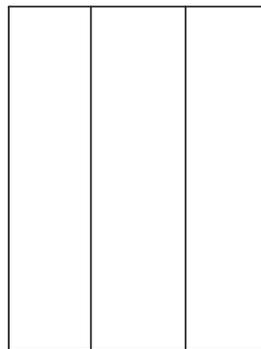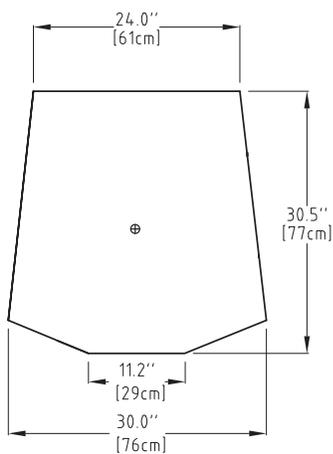

⊕ = Center of Gravity

